

# CFT150-12V

12V 150AH

Front Terminal Battery



## CFT150-12V



## Physical Specification


Part Number:	<b>CFT150-12V</b>
Length:	<b>550 ± 2 mm ( 21.66 inches)</b>
Width:	<b>125 ± 2 mm ( 4.92 inches)</b>
Container Height:	<b>281.5± 2 mm ( 11.08 inches)</b>
Total Height (with terminal):	<b>281.5± 2 mm ( 11.08 inches)</b>
Approx Weight:	<b>50.6 Kg (111.5 lbs)</b>

## Specifications

	Nominal Voltage	12V	
	(C10,1.80V/cell)	150AH	
<b>Terminal Option</b>	M6		
<b>Container Material</b>	Standard Option	ABS	
	Flame Retardant Option (FR)	ABS (UL94:VO)	
<b>Rated Capacity</b>	(20hr,7.94A,1.80V/cell)	159.0 Ah	
	(10hr,15.0A,1.80V/cell)	150.0 Ah	
	(8hr,18.3A,1.75V/cell)	146.4 Ah	
	(5hr,27.3A,1.75V/cell)	136.5 Ah	
	(1hr,1010A,1.67V/cell)	101.0 Ah	
<b>Max Discharge Current (5s)</b>	1500A		
<b>Internal Resistance</b>	Approx. 3.7 mΩ		
<b>Discharge Characteristics</b>	Operating Temp. Range	Discharge: -15°C~50°C (5°F~122°F)	
		Charge: 0°C~40°C (32°F~104°F)	
		Storage: -15°C~40°C (5°F~104°F)	
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)	
	Cycle Use	Initial Charging Current less than 45.0A. Voltage 14.1V~14.4V at 25°C (77°F) Temp. Coefficient -30mV/°C	
	Standby Use	Initial Charging Current less than 45.0A. Voltage 13.5V~13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C	
	Capacity affected by Temperature	40°C (104°F)	103%
		25°C (77°F)	100%
0°C (32°F)		86%	
<b>Design Floating Life at 20°C</b>	12+ Years		
<b>Self Discharge</b>	Canbat Front Terminal batteries may be stored for up to 6 months at 25°C (77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter. Self-discharge is less than 2%		

## Dimensions

### M6 Terminal

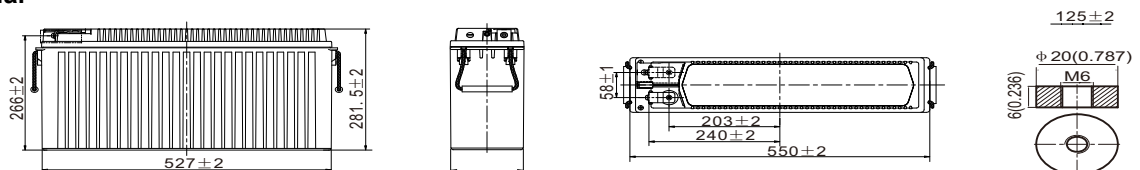

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website [www.canbat.com](http://www.canbat.com). Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E

# CFT150-12V

12V 150AH

Front Terminal Battery




## Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	251.3	216.6	189.9	147.6	112.0	90.3	53.0	38.2	30.7	25.4	22.1	17.3	14.34	7.60
1.80V/cell	284.9	242.4	207.0	158.1	118.8	94.9	55.9	40.6	32.2	26.7	23.2	18.1	15.00	7.94
1.75V/cell	312.7	260.4	220.1	165.0	122.8	98.2	57.0	41.3	33.1	27.3	23.6	18.3	15.17	8.06
1.70V/cell	334.5	273.0	227.3	169.5	125.4	99.6	57.8	41.7	33.3	27.5	23.8	18.5	15.32	8.12
1.67V/cell	351.0	283.2	234.0	173.7	127.6	101.0	58.4	42.1	33.5	27.7	24.1	18.8	15.46	8.16
1.60V/cell	363.8	292.2	240.8	178.8	130.2	102.6	59.0	42.8	34.2	28.5	24.6	19.2	15.75	8.21


## Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	469.3	408.5	361.8	284.3	217.5	176.0	104.0	75.1	60.6	50.3	43.8	34.6	28.67	15.21
1.80V/cell	525.8	451.1	388.6	299.9	229.0	183.9	109.0	79.5	63.4	52.6	45.9	35.9	29.94	15.87
1.75V/cell	567.9	478.7	409.2	310.4	234.4	189.6	110.7	80.5	64.8	53.6	46.5	36.3	30.25	16.09
1.70V/cell	593.9	494.9	419.4	317.1	238.5	191.5	112.0	81.2	65.0	53.8	46.9	36.7	30.52	16.20
1.67V/cell	620.8	511.3	430.1	324.3	241.9	193.7	112.9	81.8	65.5	54.3	47.4	37.2	30.75	16.26
1.60V/cell	625.7	517.1	436.3	329.5	244.1	194.9	113.0	82.6	66.5	55.5	48.1	37.9	31.28	16.33


### Discharge Characteristics

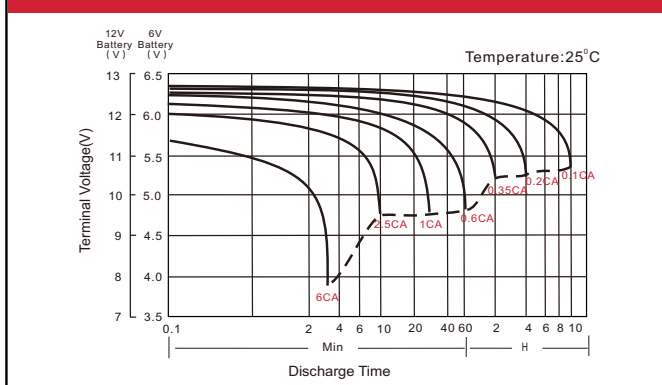


### Float Charging Characteristics

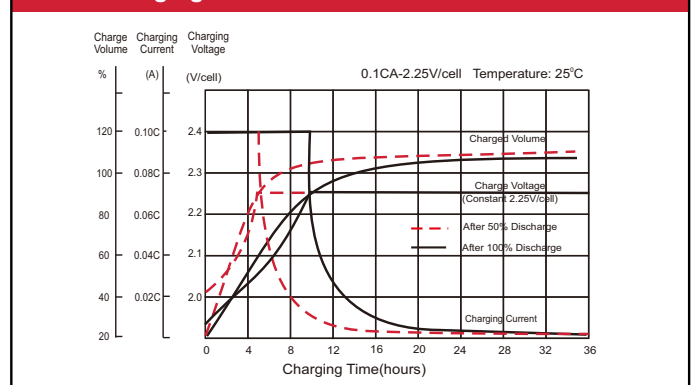

### Temperature Effects in Relation to Battery Capacity

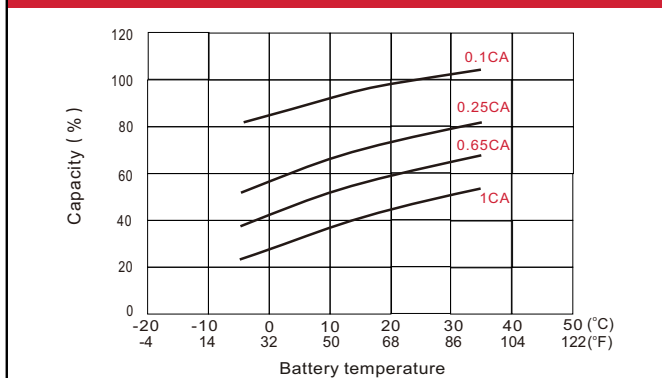

### Float Service Life

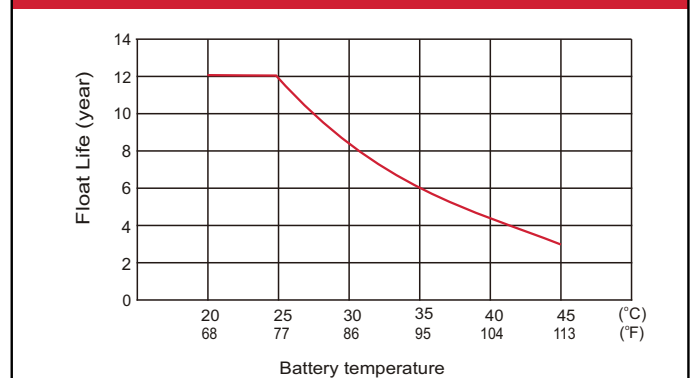

### Front Terminal Battery Features

- Front terminal design
- Absorbent Glass Mat (AGM)
- Short recharging time
- Spill-free / Spill-proof
- High power and volume rat
- High reliability
- Oxygen recombination technology
- Unrivalled energy density
- Rechargeable lead acid battery
- Alloy plate grid
- Valve regulated
- Optimum quality
- Low self-discharge rate
- Extremely safe operations
- Developed in Canada

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website [www.canbat.com](http://www.canbat.com). Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E