

# CFT40-12

12V 40AH

Front Terminal Battery



## CFT40-12



## Physical Specification


Part Number:	<b>CFT40-12</b>
Length:	<b>277 ± 2 mm ( 3.78 inches)</b>
Width:	<b>106 ± 2 mm ( 0.98 inches)</b>
Container Height:	<b>222 ± 2 mm ( 2.44 inches)</b>
Total Height (with terminal):	<b>222 ± 2 mm ( 2.44 inches)</b>
Approx Weight:	<b>14.6 Kg (32.2 lbs)</b>

## Specifications

	Nominal Voltage	12V
	(C10, 1.80V/cell)	40AH
<b>Terminal Option</b>	M6	
<b>Container Material</b>	Standard Option	ABS
	Flame Retardant Option (FR)	ABS (UL94:VO)
<b>Rated Capacity</b>	(20hr, 2.1A, 1.80V/cell)	42.0 Ah
	(10hr, 4.0A, 1.80V/cell)	40.0 Ah
	(8hr, 4.98A, 1.75V/cell)	39.8 Ah
	(5hr, 7.56A, 1.75V/cell)	37.8 Ah
	(1hr, 27.6A, 1.67V/cell)	27.6 Ah
<b>Max Discharge Current (5s)</b>	400A	
<b>Internal Resistance</b>	Approx. 9.0 mΩ	
<b>Discharge Characteristics</b>	Operating Temp. Range	Discharge: -15°C~50°C (5°F~122°F)
		Charge: 0°C~40°C (32°F~104°F)
		Storage: -15°C~40°C (5°F~104°F)
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Cycle Use	Initial Charging Current less than 12.0A. Voltage 14.1V~14.4V at 25°C (77°F) Temp. Coefficient -30mV/°C
	Standby Use	Initial Charging Current less than 12.0A. Voltage 13.5V~13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C
	Capacity affected by Temperature	40°C (104°F)
25°C (77°F)		100%
0°C (32°F)		86%
<b>Design Floating Life at 20°C</b>	12+ Years	
<b>Self Discharge</b>	Canbat Front Terminal batteries may be stored for up to 6 months at 25°C (77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter. Self-discharge is less than 2%	

## Dimensions

### T6 Terminal

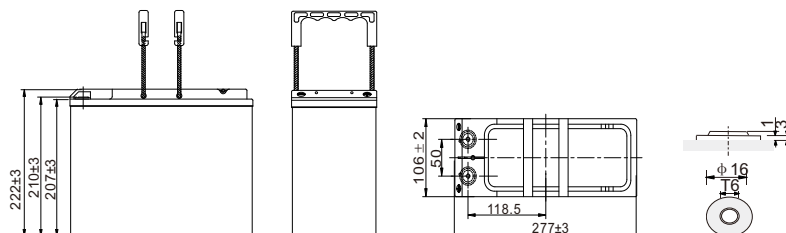

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website [www.canbat.com](http://www.canbat.com). Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E

# CFT 40-12

12V 40AH

Front Terminal Battery




## Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	67.5	59.3	51.3	40.3	30.2	22.8	13.7	10.3	8.21	6.86	6.05	4.57	3.75	2.01
1.80V/cell	77.8	66.7	56.8	43.5	32.0	25.2	14.9	11.2	8.85	7.39	6.22	4.90	4.00	2.10
1.75V/cell	83.5	70.7	59.4	45.1	32.9	26.1	15.3	11.4	9.07	7.56	6.34	4.98	4.06	2.15
1.70V/cell	88.5	73.3	61.3	46.4	33.6	27.1	15.8	11.8	9.30	7.73	6.46	5.07	4.13	2.17
1.67V/cell	92.3	75.2	62.8	47.3	34.2	27.6	16.1	12.0	9.43	7.83	6.51	5.13	4.16	2.19
1.60V/cell	95.0	77.4	64.1	48.3	34.7	29.0	16.7	12.4	9.74	8.07	6.59	5.25	4.25	2.23


## Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	129.9	109.4	94.8	75.2	58.8	44.2	26.7	20.2	16.1	13.5	12.1	9.04	7.42	4.00
1.80V/cell	145.5	123.6	103.4	81.0	62.8	48.6	28.9	21.8	17.3	14.5	12.7	9.65	7.90	4.17
1.75V/cell	157.2	129.4	109.3	84.4	64.5	50.1	29.6	22.3	17.7	14.8	12.9	9.81	8.01	4.26
1.70V/cell	164.4	135.2	112.9	86.4	65.8	51.6	30.4	22.8	18.1	15.1	13.0	10.0	8.13	4.31
1.67V/cell	169.5	138.7	114.7	87.3	65.8	52.4	30.8	23.1	18.3	15.2	13.1	10.1	8.19	4.34
1.60V/cell	173.2	145.9	118.2	89.2	66.8	54.4	31.9	23.8	18.8	15.6	13.3	10.3	8.34	4.42


### Discharge Characteristics

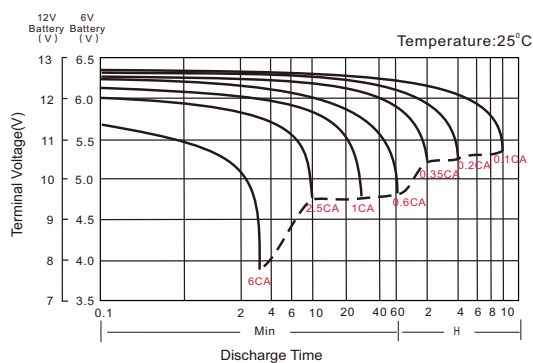


### Float Charging Characteristics

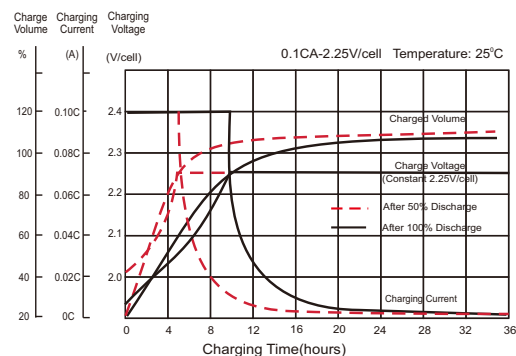

### Temperature Effects in Relation to Battery Capacity

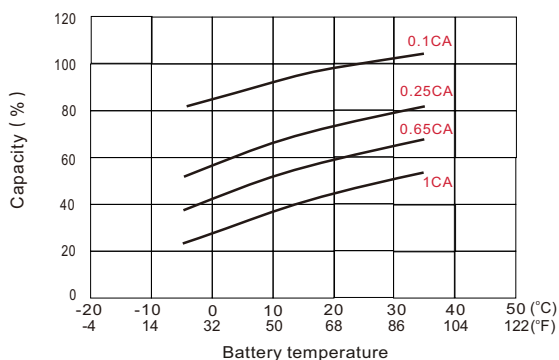

### Float Service Life

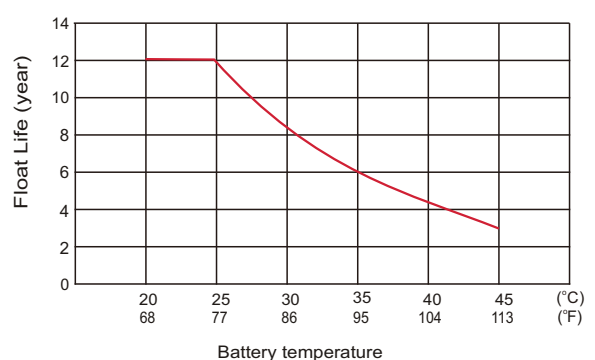

### Front Terminal Battery Features

- Front terminal design
- Absorbent Glass Mat (AGM)
- Short recharging time
- Spill-free / Spill-proof
- High power and volume rat
- High reliability
- Oxygen recombination technology
- Unrivalled energy density
- Rechargeable lead acid battery
- Alloy plate grid
- Valve regulated
- Optimum quality
- Low self-discharge rate
- Extremely safe operations
- Developed in Canada

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website [www.canbat.com](http://www.canbat.com). Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E