

CFT55-12

12V 55AH

Front Terminal Battery



CFT55-12



Physical Specification


Part Number:	CFT55-12
Length:	277 ± 2 mm (10.9 inches)
Width:	106 ± 2 mm (4.17 inches)
Container Height:	222 ± 2 mm (8.74 inches)
Total Height (with terminal):	222 ± 2 mm (8.74 inches)
Approx Weight:	17.3 Kg (38.2 lbs)

Specifications

	Nominal Voltage	12V	
	(C10, 1.80V/cell)	55AH	
Terminal Option	M6		
Container Material	Standard Option	ABS	
	Flame Retardant Option (FR)	ABS (UL94:VO)	
Rated Capacity	(20hr, 2.91A, 1.80V/cell)	58.2 Ah	
	(10hr, 5.50A, 1.80V/cell)	55.0 Ah	
	(8hr, 6.70A, 1.75V/cell)	53.6 Ah	
	(5hr, 9.64A, 1.75V/cell)	48.2 Ah	
	(1hr, 35.9A, 1.67V/cell)	35.9 Ah	
Max Discharge Current (5s)	550A		
Internal Resistance	Approx. 6.5 mΩ		
Discharge Characteristics	Operating Temp. Range	Discharge: -15°C~50°C (5°F~122°F)	
		Charge: 0°C~40°C (32°F~104°F)	
		Storage: -15°C~40°C (5°F~104°F)	
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)	
	Cycle Use	Initial Charging Current less than 15.0A. Voltage 14.1V~14.4V at 25°C (77°F) Temp. Coefficient -30mV/°C	
	Standby Use	Initial Charging Current less than 12.0A. Voltage 13.5V~13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C	
	Capacity affected by Temperature	40°C (104°F)	103%
		25°C (77°F)	100%
0°C (32°F)		86%	
Design Floating Life at 20°C	12+ Years		
Self Discharge	Canbat Front Terminal batteries may be stored for up to 6 months at 25°C (77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter. Self-discharge is less than 2%		

Dimensions

M6 Terminal

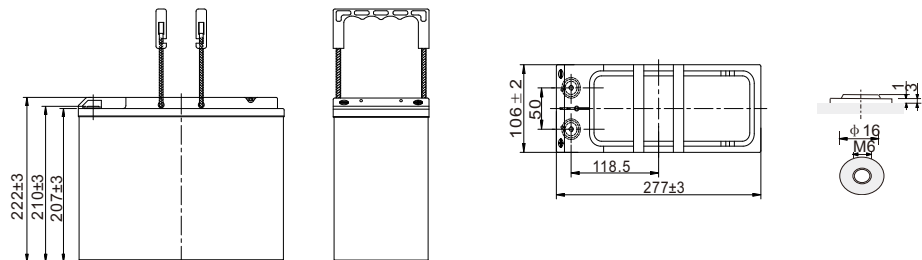

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website www.canbat.com. Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E

CFT55-12

12V 55AH

Front Terminal Battery




Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	87.8	76.2	65.9	51.7	39.4	31.7	18.3	13.3	10.7	8.97	7.86	6.30	5.26	2.79
1.80V/cell	101.3	86.0	73.0	56.6	42.5	33.9	19.7	14.3	11.3	9.52	8.29	6.62	5.50	2.91
1.75V/cell	111.9	93.1	78.9	59.5	43.9	34.9	20.1	14.5	11.5	9.64	8.39	6.70	5.56	2.93
1.70V/cell	118.1	98.3	82.0	61.2	44.9	35.5	20.4	14.7	11.6	9.73	8.46	6.75	5.60	2.95
1.67V/cell	123.4	102.1	84.5	62.2	45.5	35.9	20.5	14.8	11.7	9.82	8.53	6.81	5.64	2.97
1.60V/cell	128.7	104.9	86.3	63.5	46.1	36.4	20.7	14.9	11.8	9.90	8.61	6.86	5.68	2.99


Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	167.2	146.5	127.8	100.9	77.2	62.4	36.3	26.5	21.3	17.9	15.8	12.7	10.6	5.63
1.80V/cell	191.6	164.4	140.6	109.9	82.9	66.5	38.9	28.3	22.6	19.0	16.6	13.3	11.1	5.87
1.75V/cell	210.0	176.5	151.1	114.9	85.5	68.3	39.6	28.8	22.9	19.2	16.8	13.4	11.2	5.90
1.70V/cell	218.8	184.6	155.6	117.3	86.7	69.2	39.9	28.9	23.0	19.3	16.9	13.5	11.2	5.93
1.67V/cell	225.1	188.8	158.3	117.8	87.2	69.3	40.0	29.0	23.1	19.4	17.0	13.6	11.3	5.95
1.60V/cell	229.8	190.9	159.6	119.0	87.5	69.8	40.2	29.1	23.2	19.5	17.1	13.7	11.3	5.98


Discharge Characteristics

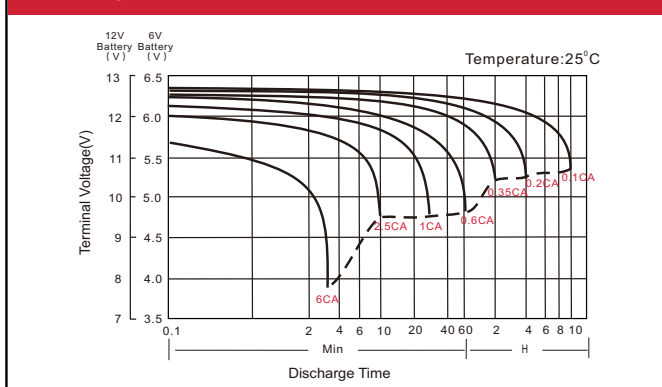


Float Charging Characteristics

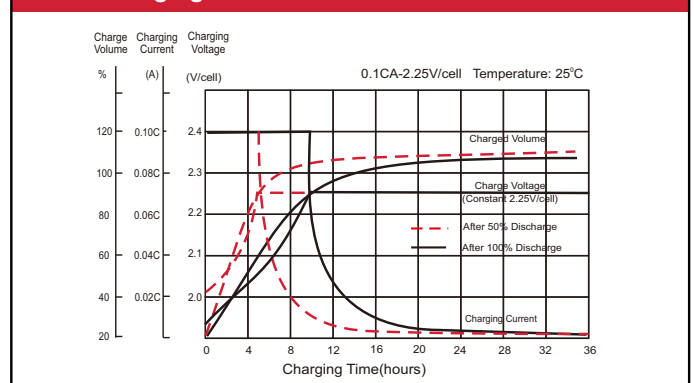

Temperature Effects in Relation to Battery Capacity

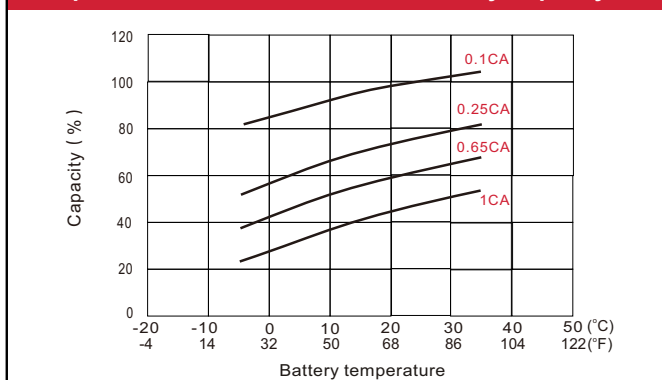

Float Service Life

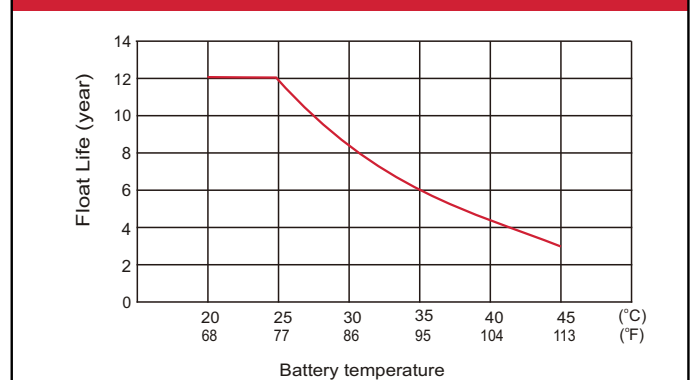

Front Terminal Battery Features

- Front terminal design
- Absorbent Glass Mat (AGM)
- Short recharging time
- Spill-free / Spill-proof
- High power and volume rat
- High reliability
- Oxygen recombination technology
- Unrivalled energy density
- Rechargeable lead acid battery
- Alloy plate grid
- Valve regulated
- Optimum quality
- Low self-discharge rate
- Extremely safe operations
- Developed in Canada

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website www.canbat.com. Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E