High Rate Battery



CHR225-12 CANBAT Maintenance-free Sealed Lead-acid Battery Mainte

Physical Specification

Part Number: CHR225-12

Length: **522±1mm (20.55 inches)**


Width: **240±1mm (9.45 inches)**

Container Height: 218±1mm (8.58 inches)

Total Height (with terminal): 224±1mm (8.82 inches)

Approx Weight: **64.8 Kg (142.9 lbs)**

Specifications		
	Nominal Voltage	12V
	Nominal Rate (W ,1.67V/cell)	765W
	Nominal Capacity (C10,1.80V/cell)	225Ah
	Technology	High Rate Discharge
	Terminal Type	M8
Container Material	Flame Retardant (FR)	ABS (UL94:VO)
Rated Capacity (25°C)	(10hr, 22.5A,1.80V/cell)	225.0 Ah
	(8hr, 27.0A,1.80V/cell)	216.0 Ah
	(5hr, 39.4A,1.75V/cell)	197.0 Ah
	(3hr, 59.6A,1.75V/cell)	178.8 Ah
	(1hr, 144.0A,1.67V/cell)	144.0 Ah
Max Currents (5s)	2250A	
Internal Resistance	Approx. 2.6mΩ	
Discharge Characteristics		Discharge: -20°C~55°C (-4°F~131°F)
	Operating Temp. Range	Charge: 0°C~40°C (32°F~104°F)
		Storage: -15°C~50°C (5°F~122°F)
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Max.Charging Current(25 C)	56.25A
		Float 13.5V
	Charge voltage(25 C)	Temp. Coefficient -3m V/cell/ C
		Equalization 14 .1~14.4V
		40°C (104°F) 106%
	Effect of temperature on Capacity	25°C (77°F) 100%
		0°C (32°F) 86%
Design Floating Life at 20°C	20+ Years	
Self Discharge		ored for up to 6 months at 25°C (77°F) and then a refresh cha ne time interval will be shorter. Self-discharge is less than 2%

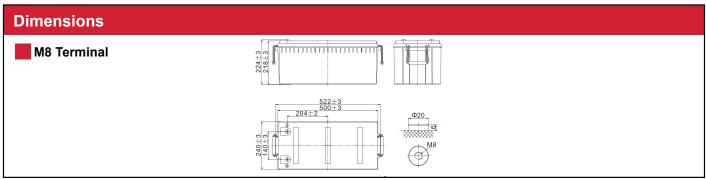


To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website www.canbat.com. Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E


High Rate Battery





Constant Current Discharge (Amperes) at 25 °C (77°F)														
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	468.3	349.6	291.2	244.7	188.1	140.3	118.6	88.9	71.2	53.7	42.8	35.7	25.2	21.1
1.80V/cell	545.9	412.2	338.6	281.9	212.6	156.9	131.2	97.3	77.4	58.1	46.1	38.5	27.0	22.5
1.75V/cell	595.7	442.0	358.2	295.8	222.2	163.3	136.1	100.6	79.8	59.6	47.3	39.4	27.5	22.8
1.70V/cell	645.2	471.4	378.5	311.3	232.0	169.5	141.1	104.0	82.4	61.4	48.4	40.3	28.0	23.2
1.67V/cell	673.6	488.7	390.5	320.1	237.9	173.3	144.0	105.8	83.7	62.3	49.1	40.8	28.3	23.4
1.60V/cell	742 5	528 8	418 5	340.9	251.3	182 3	151.0	110.5	87.2	64.6	50.7	42 0	28 9	23.9

Constant Power Discharge (Watts/cell) at 25 °C (77°F)														
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	917.7	644.2	602.7	548.3	410.1	302.3	232.3	174.8	139.3	105.5	87.0	74.2	52.7	44.0
1.80V/cell	1037.2	727.6	649.5	583.5	435.1	317.8	244.8	182.3	146.3	109.8	90.3	76.8	53.8	45.0
1.75V/cell	1117.8	797.5	701.7	621.3	461.5	336.2	258.8	192.2	152.4	113.9	93.3	79.1	54.7	45.4
1.70V/cell	1188.0	849.9	739.5	647.5	485.3	352.9	267.7	198.5	157.3	116.8	95.4	80.5	55.3	45.7
1.67V/cell	1231.7	900.6	765.0	672.5	502.4	362.9	275.8	204.1	161.4	119.8	97.1	81.5	55.8	46.1
1.60V/cell	1249.3	948.5	796.4	686.9	515.4	370.8	282.1	208.2	164.4	120.9	98.0	82.7	56.4	46.7

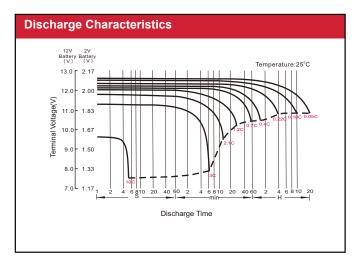

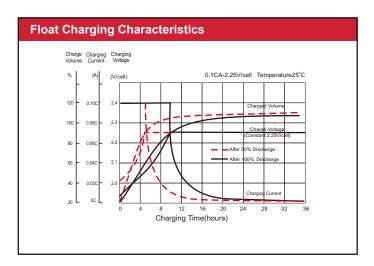





High Rate Batteries

The most important asset for many businesses is data. Whether it's customer data, employee data or financial data, no business can afford to lose it. Unfortunately, unexpected power interruptions may lead to a loss of data, which could potentially cost thousands of dollars. To solve this issue, Canbat has developed the highest performing high rate batteries, which are specially designed for back-up power systems. Our batteries have a proven track record to be the most reliable in the industry, backed up with the best warranty in Canada. In the event of a power outage, UPS systems provide back-up power to your equipment. The most important component in any UPS is the battery. Whether the UPS is hooked up to your personal computer at home, or to your equipment at work, Canbat offers top-performing batteries you can count on. If you don't have high performing batteries in your UPS during a power outage, you are putting yourself at risk of losing data. A power surge or blackout could erase hours of hard work and damage your equipment.

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website www.canbat.com. Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E