

CHT200-12

12V 200AH

High Temperature Battery



CHT200-12



Physical Specification


Part Number:	CHT200-12
Length:	522 ± 2 mm (20.94 inches)
Width:	240 ± 2 mm (8.15 inches)
Container Height:	218 ± 2 mm (8.35 inches)
Total Height (with terminal):	224 ± 2 mm (8.66 inches)
Approx Weight:	67.4 kg (148.6 lbs)

Specifications

	Nominal Voltage	12V					
	Nominal Capacity (10HR)	200AH					
Terminal Type	Standard Terminal	T11					
	Optional Terminal	(M8,Torque11~14.7N m)					
Container Material	Standard Option	ABS(High Temperature Resistant Material)					
	Flame Retardant Option (FR)	ABS (UL94:VO)					
Rated Capacity(35°)	C20(10.7A,1.80V/cell)	214.0 Ah					
	C10(20.0A,1.80V/cell)	200.0 Ah					
	C5(34.8A,1.75V/cell)	174.0 Ah					
	C3(52.0A,1.75V/cell)	156.0 Ah					
	C1(120.4A,1.67V/cell)	120.4Ah					
Max Discharge Current	1600A (5s)						
Internal Resistance	Approx 6mΩ						
Discharge Characteristics	Operating Temp. Range	The battery can operate at temperatures of -40C ~ +65C. Extreme temperature can be up to 80C.					
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)					
	Cycle Use	Initial Charging Current less than 50A.Voltage 14.1V ~ 14.4V at 25°C (77°F) Temp. Coefficient -30mV/°C					
	Standby Use	Initial Charging Current less than 50A.Voltage 13.5V at 25°C (77°F) Temp. Coefficient -20mV/°C					
	Capacity affected by Temperature	<table border="1"> <tr> <td>40°C (104°F)</td> <td>103%</td> </tr> <tr> <td>25°C (77°F)</td> <td>100%</td> </tr> <tr> <td>0°C (32°F)</td> <td>79%</td> </tr> </table>	40°C (104°F)	103%	25°C (77°F)	100%	0°C (32°F)
40°C (104°F)	103%						
25°C (77°F)	100%						
0°C (32°F)	79%						
Design Floating Life at 20°C	5 Years						
Self Discharge	Canbat High Temperature Batteries may be stored for up to 6 months at 25°C(77F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.						

Dimensions

M8 Terminal

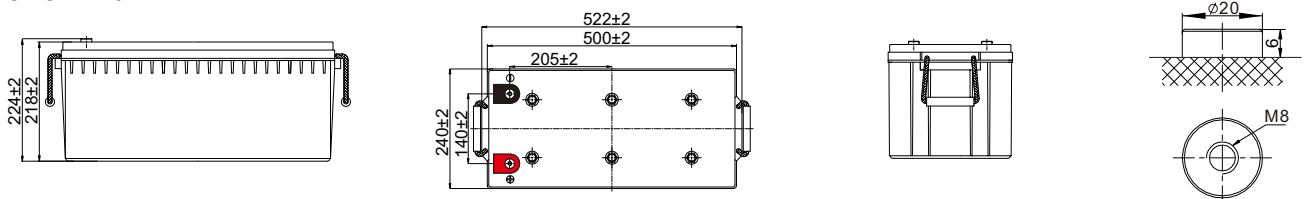

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website www.canbat.com. Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E


Constant Current Discharge (Amperes) at 35 °C (95°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	234.0	196.8	174.6	144.8	111.7	95.6	61.9	46.5	38.1	32.1	28.1	22.5	19.4	10.3
1.80V/cell	267.8	221.0	193.0	157.3	120.5	100.9	66.5	50.0	40.5	34.0	29.8	23.7	20.0	10.7
1.75V/cell	304.1	249.1	213.3	170.9	131.5	110.0	69.2	52.0	41.9	34.8	30.7	24.5	20.5	11.0
1.70V/cell	343.5	276.3	235.5	186.6	141.6	116.4	72.9	54.7	43.8	36.8	32.2	25.6	21.3	11.3
1.67V/cell	368.8	295.9	250.5	196.9	149.9	120.4	75.6	56.9	45.5	38.0	33.3	26.4	21.9	11.6
1.60V/cell	405.8	324.1	272.1	210.1	155.7	124.0	77.5	58.4	46.5	38.9	34.0	26.9	22.4	11.8


Constant Power Discharge (Watts/cell) at 35 °C (95°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	436.9	371.2	332.6	278.9	217.0	186.3	121.4	91.7	75.3	63.5	55.8	45.0	38.7	20.7
1.80V/cell	494.1	411.2	362.4	298.3	232.3	195.6	129.7	97.9	79.6	67.0	58.9	47.2	39.9	21.4
1.75V/cell	552.3	457.9	396.7	321.5	251.0	212.3	134.4	101.4	82.1	68.4	60.6	48.6	40.9	21.9
1.70V/cell	609.8	501.0	434.6	349.1	269.3	223.9	141.3	106.6	85.6	72.2	63.4	50.6	42.5	22.4
1.67V/cell	648.9	532.3	458.9	365.4	282.5	230.0	145.6	110.4	88.6	74.2	65.4	52.2	43.6	23.1
1.60V/cell	697.8	573.5	493.2	387.2	292.0	235.6	148.6	112.7	90.3	75.8	66.5	53.0	44.4	23.4


Discharge Characteristics

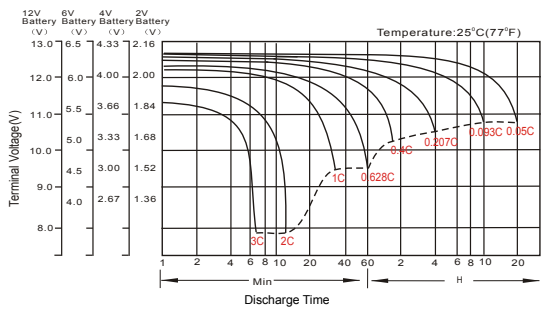


Float Charging Characteristics

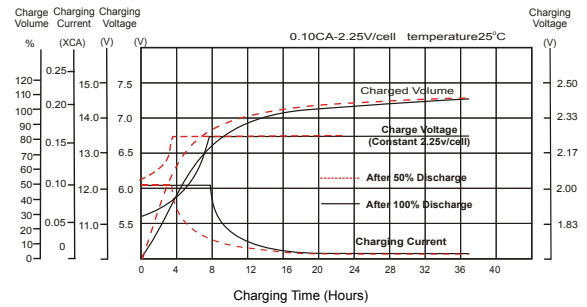


Temperature Effects in Relation to Battery Capacity

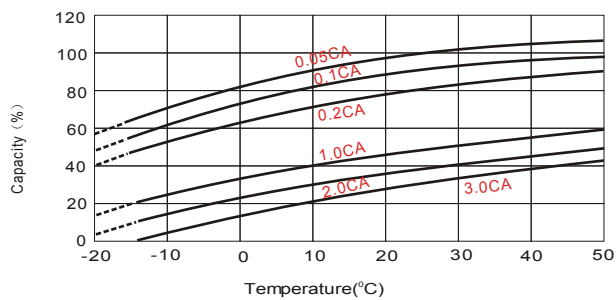


Effect of Temperature on Long Term Float Life

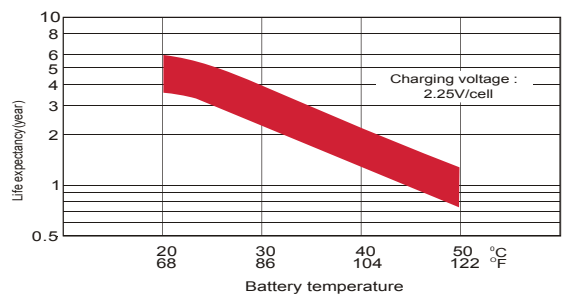

Cycle Life in Relation to Depth of Discharge

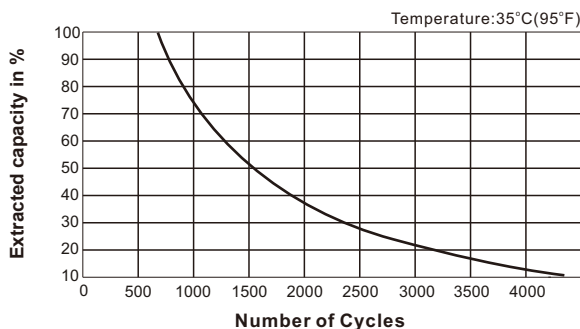

Self Discharge Characteristics

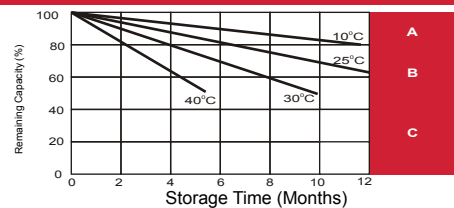

- A** No supplementary required (Carryout supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.05CA and constant voltage 2.25V/cell.
 3. Charged for 8 ~ 10 hours at limited current 0.05 CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website www.canbat.com. Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E