

CLC100-12FT

12V 100AH

Pure Lead Carbon



CLC100-12FT



Physical Specification




Part Number:	CLC100-12FT
Length:	405 ± 2 mm ( 15.96 inches)
Width:	108 ± 2 mm (4.25 inches)
Container Height:	287 ± 2 mm ( 11.30 inches)
Total Height (with terminal):	287 ± 2 mm ( 11.30 inches)
Approx Weight:	30.8 kg (67.9 lbs)

Specifications

	Nominal Voltage	12V
	Nominal Capacity (10HR)	100AH
Terminal Type	Standard Terminal	M8
	Optional Terminal	M6
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	Non-halogenated, thermally sealed PPOI plastic casing & cover
Rated Capacity(35°)	100Ah	(C10 to 1.80VDC @ 25°C)
	100Ah	(C8 to 1.75VDC @ 25°C)
	94.5Ah	(C5 to 1.75VDC @ 25°C)
	84.0Ah	(C3 to 1.75VDC @ 25°C)
Max Charge Current (A)	30.0A	
Max Discharge Current	1200A	
Internal Resistance	Approx 2.6mΩ @ 25°C @ 1Khz	
Discharge Characteristics	Operating Temp. Range	-40 ~ 65°C
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Cycle Life	Exceptional PSoC cyclic performance 2500+ cycles at 50% Depth of Discharge (DoD)
	Features	Lead carbon added to negative electrodes increases power and reduces sulfation, leak-proof operation
	Capacity affected by Temperature	40°C (104°F) 103%
		25°C (77°F) 100%
		0°C (32°F) 79%
Design Floating Life at 20°C	20+ Years	
Self Discharge	Canbat Pure Lead Carbon Batteries may be stored for up to 24 months at 25°C (°77F). For higher temperatures, the time interval will be shorter. A refresh charge is required when the OCV approach 2.10V/cell or when the maximum storage time is reached, whichever occurs first.	

Dimensions

M8 Terminal

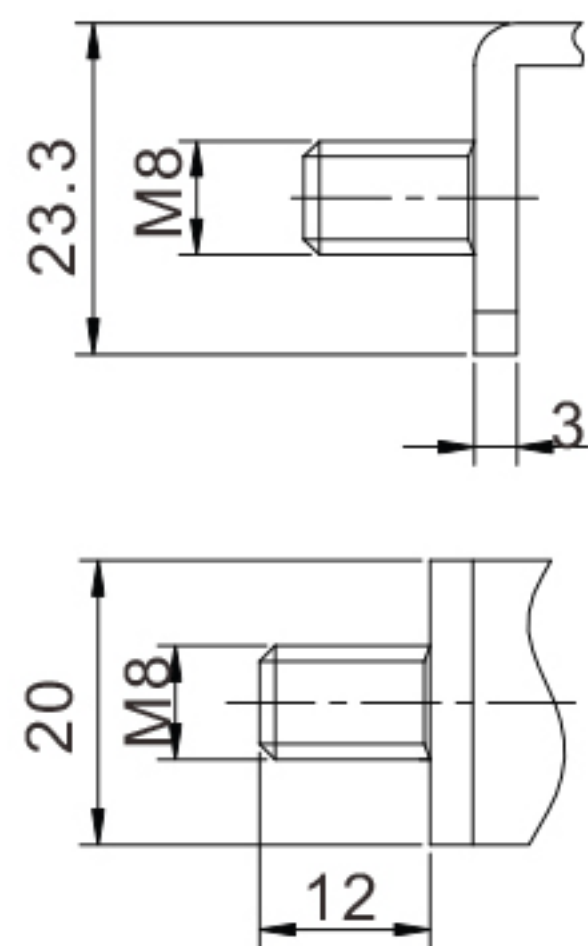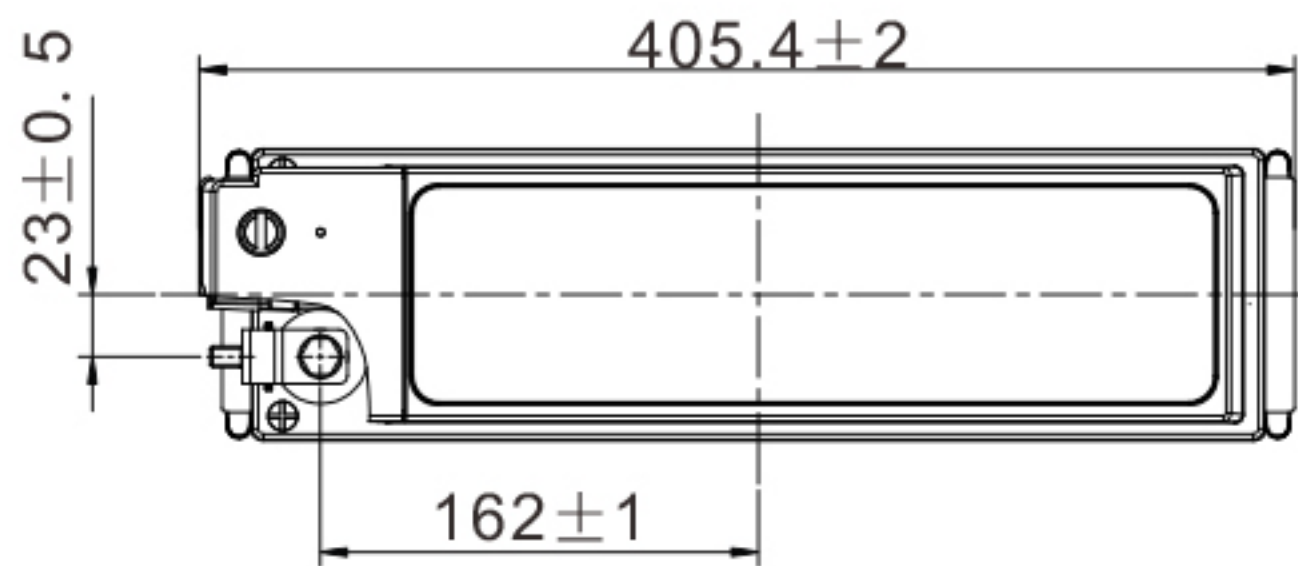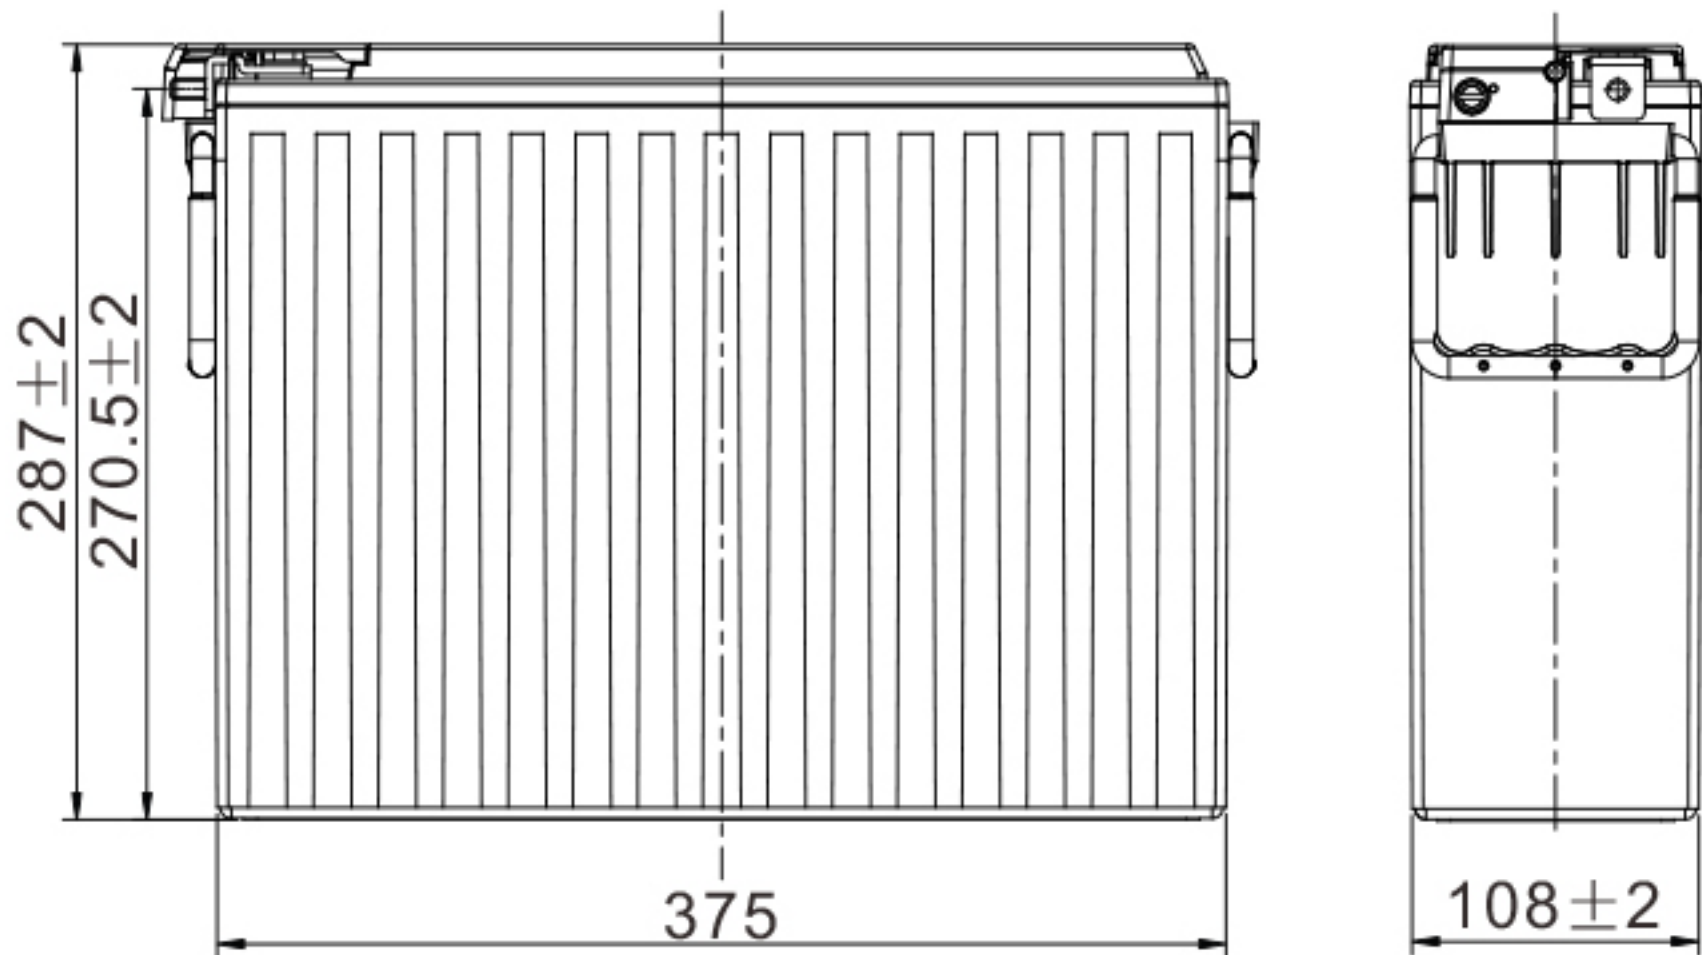

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website [www.canbat.com](http://www.canbat.com). Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E



CLC100-12FT

12V 100AH

Pure Lead Carbon




Constant Current Discharge (Amperes) at 25 °C (77°F )

F.V/Time	10 min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	185.9	153.1	131.0	102.5	78.2	63.8	37.4	26.7	21.0	18.3	12.1	9.90	5.31
1.80V/cell	206.4	167.6	142.0	109.8	82.7	66.9	38.5	27.4	21.4	18.6	12.3	10.0	5.43
1.75V/cell	225.6	180.8	151.7	115.9	86.5	69.4	39.6	28.0	21.7	18.9	12.5	10.2	5.54
1.70V/cell	242.7	192.1	160.0	120.9	89.6	71.4	40.3	28.3	22.0	19.2	12.7	10.3	5.62
1.67V/cell	251.9	197.8	163.9	123.3	90.9	72.4	40.6	28.5	22.2	19.3	12.8	10.3	5.65
1.60V/cell	268.5	207.3	170.2	126.7	92.7	73.6	41.2	28.9	22.5	19.5	12.9	10.5	5.70


Constant Power Discharge (Watts/cell) at 25 °C (77°F )

F.V/Time	10 min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	358.5	286.8	251.0	192.6	150.9	123.5	73.2	52.6	41.3	36.1	24.0	19.7	10.5
1.80V/cell	401.2	314.7	271.4	204.5	157.3	130.3	76.1	53.7	42.1	36.6	24.3	19.9	10.8
1.75V/cell	431.1	334.0	285.4	213.6	160.5	134.7	77.8	54.7	42.7	37.2	24.6	20.2	11.0
1.70V/cell	448.5	345.0	293.3	218.5	163.6	138.1	79.1	55.4	43.2	37.7	24.9	20.4	11.1
1.67V/cell	467.8	357.5	302.4	224.4	167.3	139.6	79.7	55.7	43.5	37.9	25.0	20.5	11.2
1.60V/cell	481.6	365.9	308.0	227.7	169.2	141.4	80.4	56.2	43.8	38.2	25.2	21.1	11.2


Discharge Characteristics

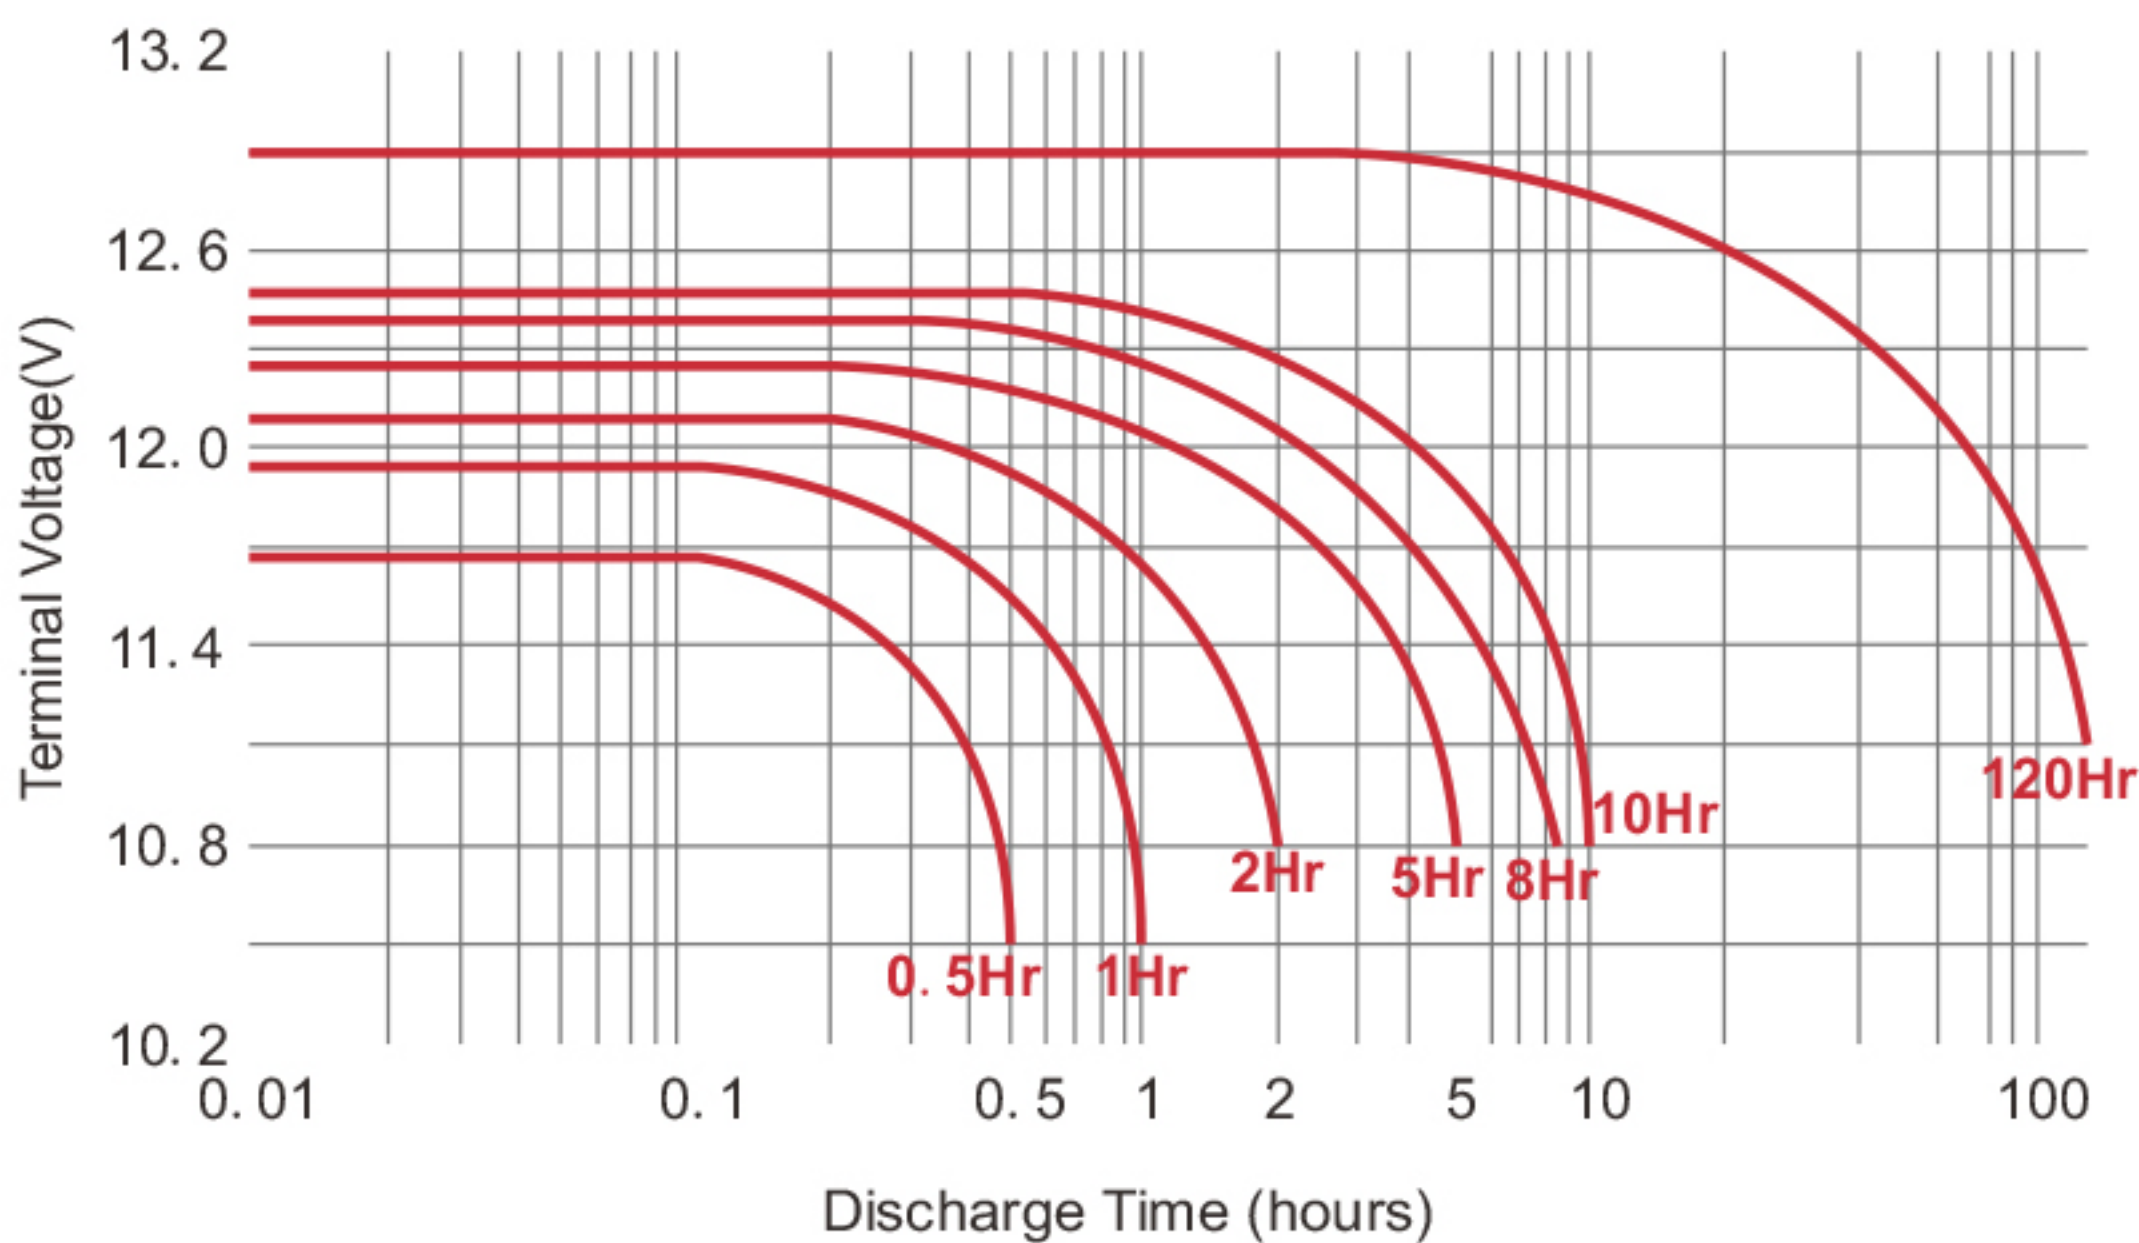


Temperature in Relation to Capacity

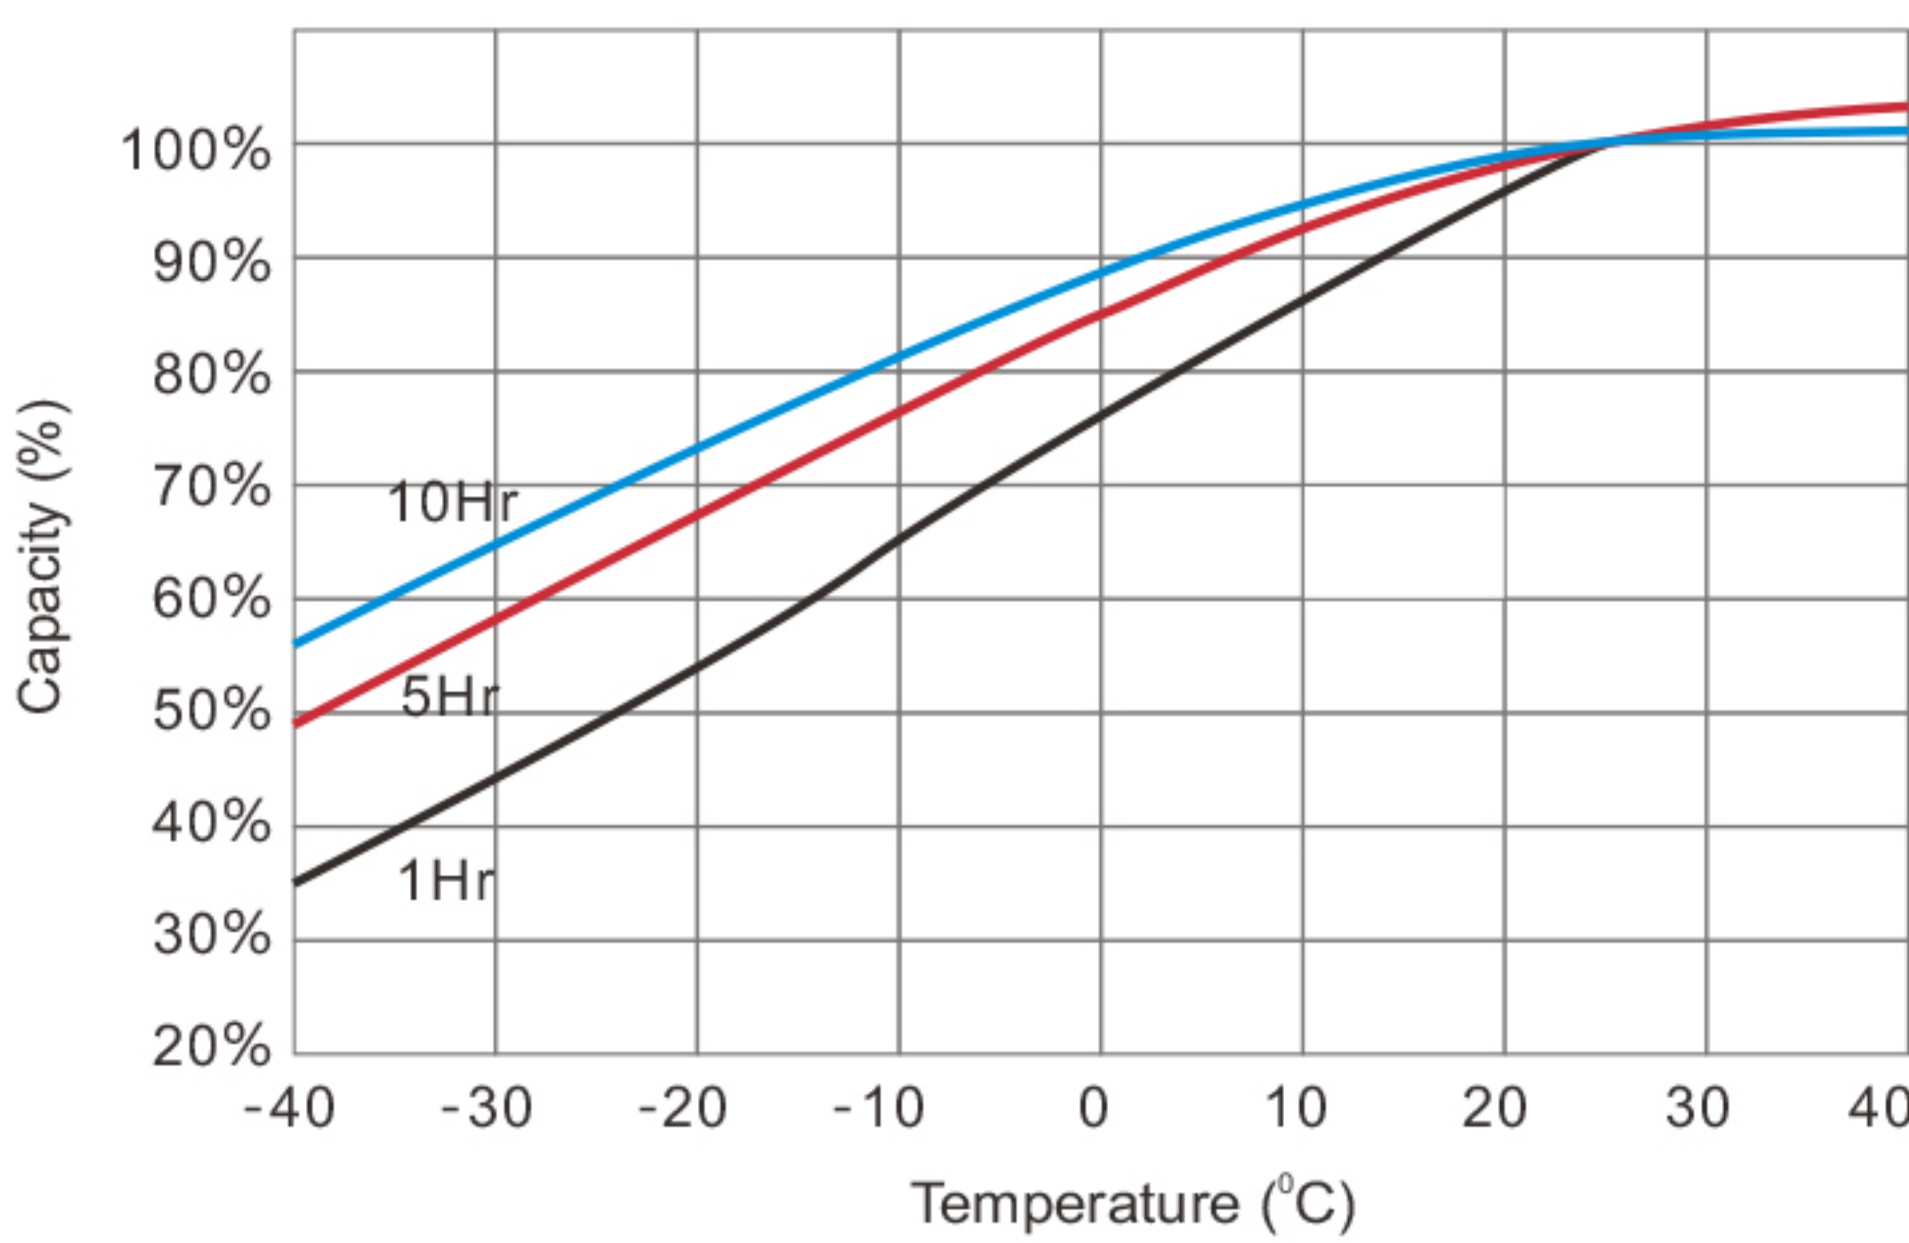

Cycle Life vs. Depth of Discharge

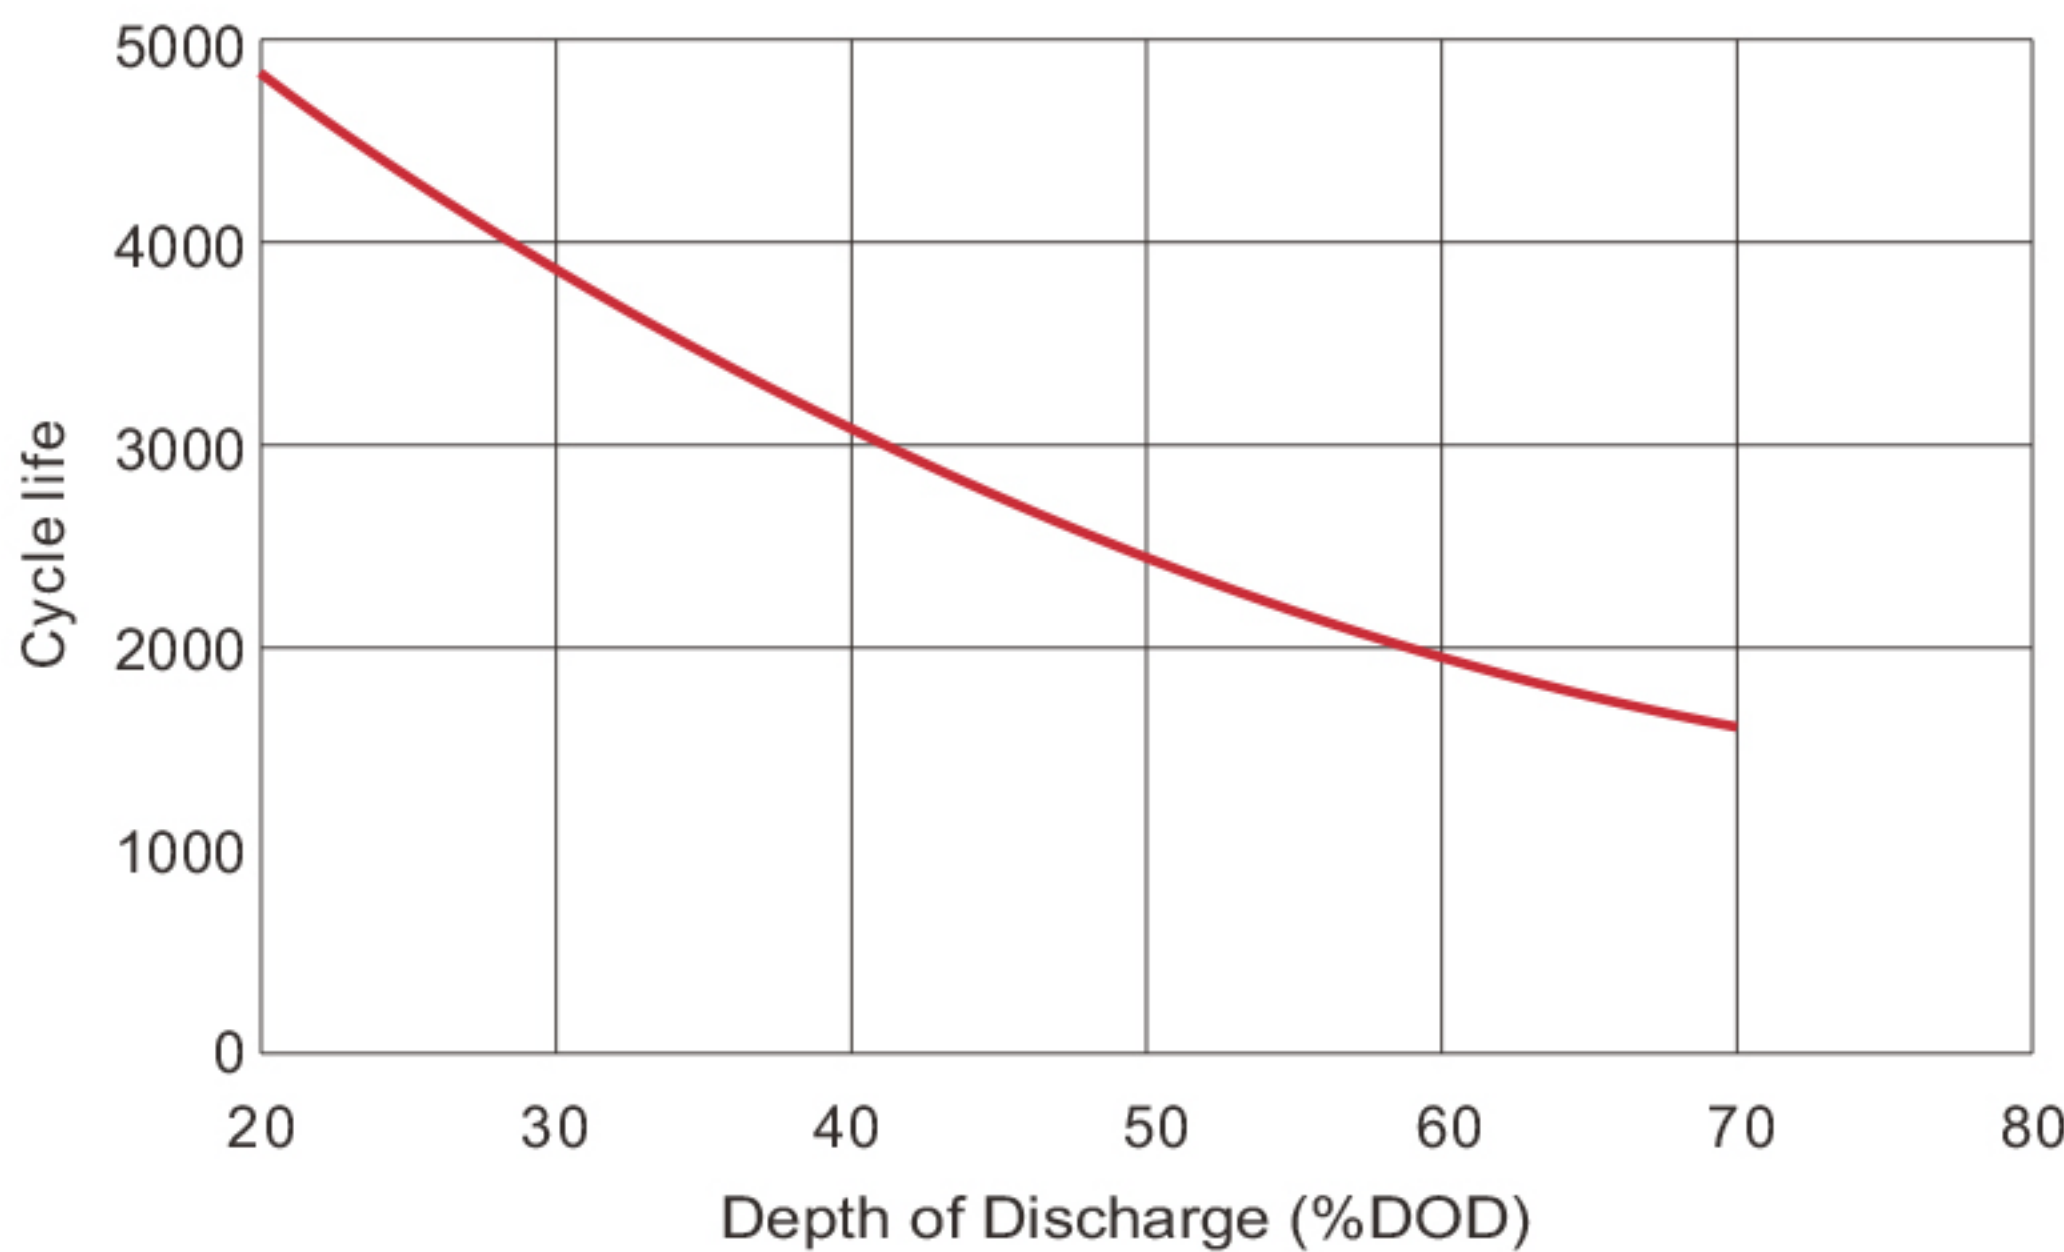

Self-discharge Characteristics

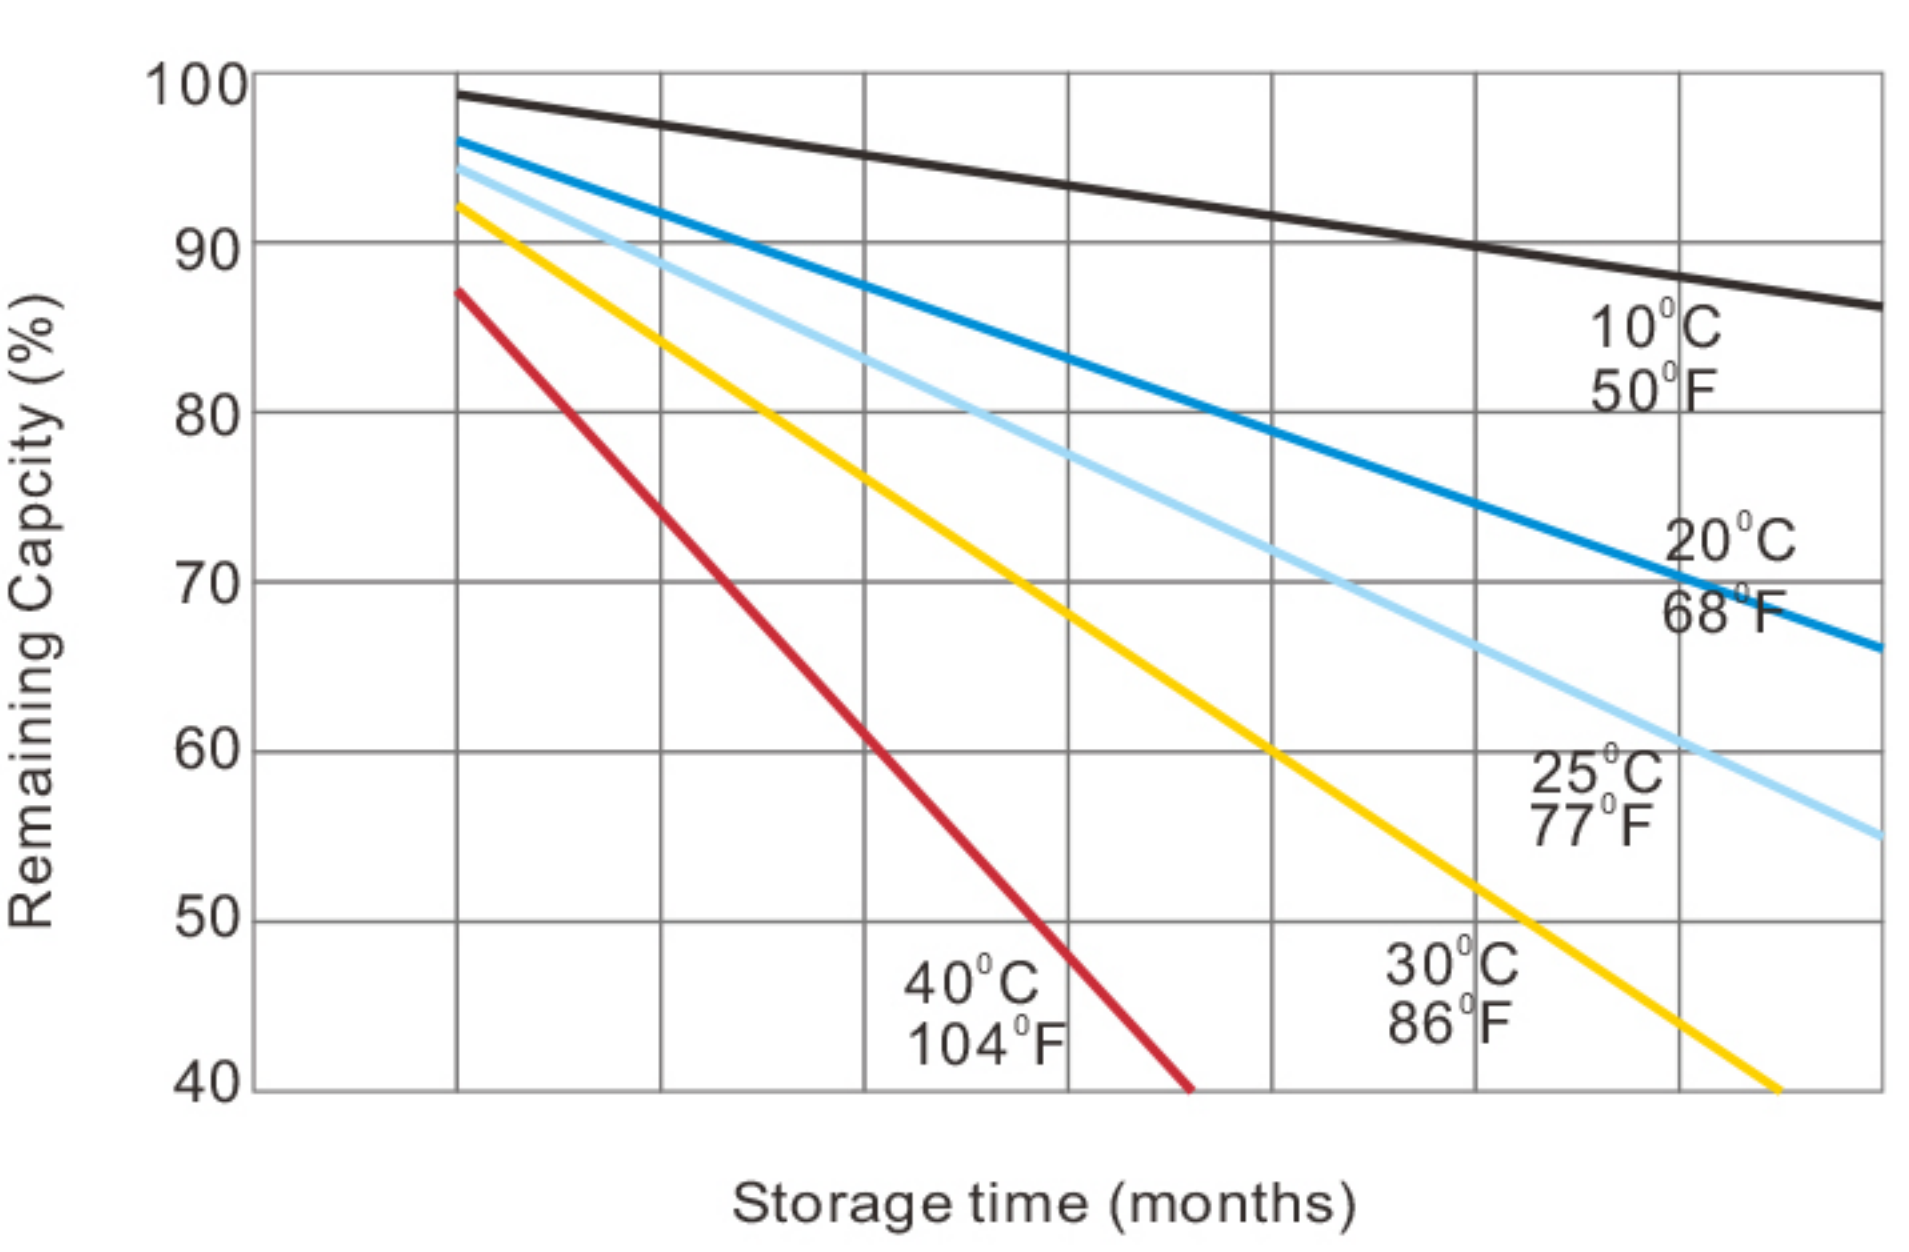

Features of Canbat Carbon Technology

- Exceptional PSoC cyclic performance 2500 cycles @50% DoD with a design life of 12+ years at 20°C (68°F)
- High modulus Polyphenylene Oxide (PPO) plastic, materials designed to withstand extended elevated operating temperatures.
- Flame retardant (UL 94 VO) and LOI of at least 28%
- Lead carbon added to negative electrodes increases power and reduces sulfation
- High potential fuel savings when used with hybrid genset applications
- Operating temperature range -40°C to +65°C (-40°F to 149°F)
- State-of-the-art automated manufacturing ensures consistency and reliability
- Advanced 3 stage terminal design to ensure leak-free operation - brass terminals provide maximum performance
- Non-halogenated thermally sealed plastic casing

To ensure safe and efficient operation always refer to the latest edition of our datasheets, as published on our website [www.canbat.com](http://www.canbat.com). Canbat Technologies Inc. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E