



Physical Specification


Part Number:	CXL450-2
Length:	210 ± 2 mm (8.27 inches)
Width:	175 ± 2 mm (6.89 inches)
Container Height:	330 ± 2 mm (12.99 inches)
Total Height (with terminal):	350 ± 2 mm (13.78 inches)
Approx Weight:	Approx 26.0 Kg

Specifications

	Nominal Voltage	2V	
	Nominal Capacity (10HR)	450AH	
Terminal Type	Standard Terminal	T11	
	Optional Terminal	-	
Container Material	Standard Option	ABS	
	Flame Retardant Option (FR)	ABS (UL94:VO)	
Rated Capacity	481.5 AH/24.1A	(20hr, 1.80V/cell, 25°C / 77°F)	
	450.0 AH/45.0A	(10hr, 1.80V/cell, 25°C / 77°F)	
	391.5 AH/78.3A	(5hr, 1.75V/cell, 25°C / 77°F)	
	351.0 AH/117.0A	(3hr, 1.75V/cell, 25°C / 77°F)	
	279.0 AH/279.0A	(1hr, 1.60V/cell, 25°C / 77°F)	
Max Discharge Current	3600A (5s)		
Internal Resistance	Approx 0.65mΩ		
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C (5 ~ 122°F)	
		Charge: 0 ~ 40°C (5 ~ 104°F)	
		Storage: -15 ~ 40°C (5 ~ 104°F)	
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)	
	Cycle Use	Initial Charging Current less than 135.0A. Voltage 2.4V ~ 2.5V at 25°C (77°F) Temp. Coefficient -5mV/°C	
	Standby Use	No limit on Initial Charging Current Voltage 2.25V ~ 2.3V at 25°C (77°F) Temp. Coefficient -3mV/°C	
	Capacity affected by Temperature	40°C (104°F)	103%
25°C (77°F)		100%	
0°C (32°F)		86%	
Design Floating Life at 20°C	15 Years		
Self Discharge	Canbat batteries may be stored for up to 6 months at 25°C(77°F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.		

Dimensions

T11 Terminal

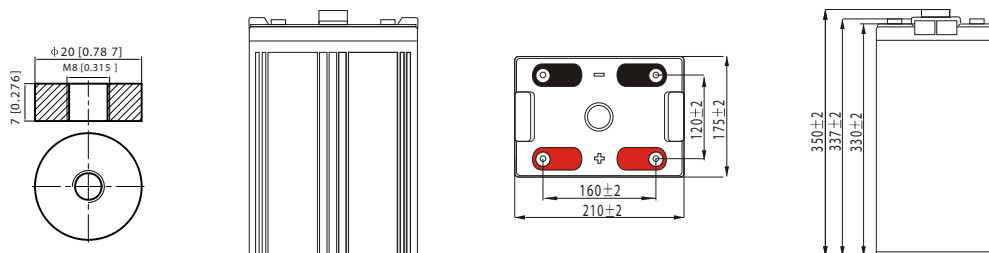


Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	526.5	442.8	392.9	325.8	251.4	215.1	139.3	104.7	85.8	72.2	63.2	50.7	43.6	23.3
1.80V/cell	602.4	497.2	434.3	353.9	271.2	227.0	149.7	112.5	91.2	76.5	67.0	53.4	45.0	24.1
1.75V/cell	684.2	560.4	480.0	384.5	295.8	247.5	155.7	117.0	94.3	78.3	69.1	55.2	46.2	24.7
1.70V/cell	772.8	621.8	529.8	419.8	318.6	261.9	164.0	123.2	98.6	82.8	72.4	57.5	48.0	25.3
1.65V/cell	829.9	665.7	563.7	443.0	337.2	270.9	170.1	128.1	102.4	85.4	74.9	59.4	49.3	26.1
1.60V/cell	912.9	729.1	612.3	472.7	350.4	279.0	174.4	131.4	104.7	87.5	76.5	60.5	50.4	26.5


Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	983.1	835.1	748.4	627.5	488.3	419.2	273.3	206.2	169.4	142.9	125.6	101.2	87.2	46.6
1.80V/cell	1111.8	925.3	815.4	671.2	522.7	440.2	291.8	220.3	179.2	150.8	132.5	106.1	89.8	48.1
1.75V/cell	1242.7	1030.2	892.6	723.4	564.7	477.6	302.3	228.2	184.7	153.8	136.2	109.5	92.1	49.3
1.70V/cell	1372.1	1127.2	977.9	785.5	606.0	503.8	317.8	239.8	192.6	162.4	142.6	114.0	95.6	50.5
1.65V/cell	1460.1	1197.7	1032.6	822.2	635.6	517.4	327.6	248.3	199.5	167.0	147.1	117.5	98.1	52.0
1.60V/cell	1570.1	1290.4	1109.7	871.3	657.0	530.1	334.3	253.6	203.3	170.4	149.7	119.3	100.0	52.8


Discharge Characteristics

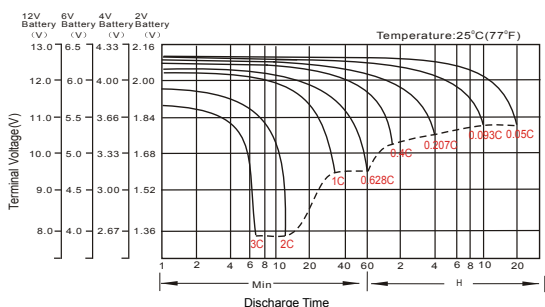


Float Charging Characteristics

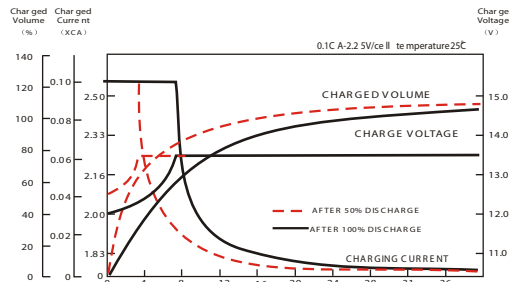


Temperature Effects in Relation to Battery Capacity

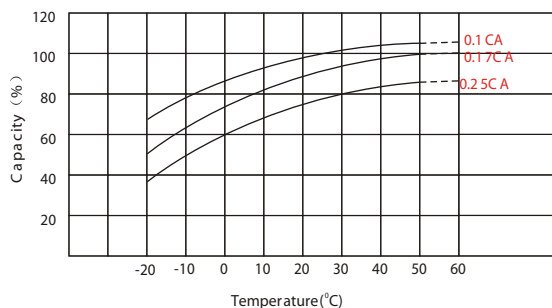

Effect of Temperature on Long Term Float Life

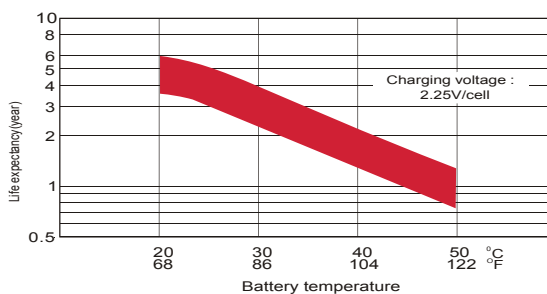

Self Discharge Characteristics

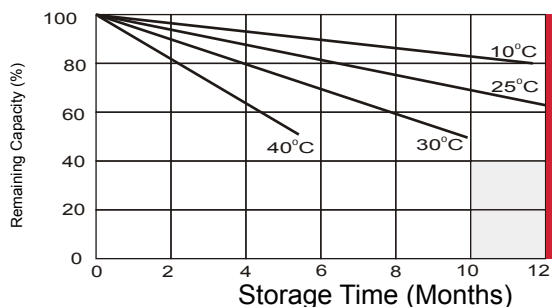

A

No supplementary required
(Carryout supplementary charge before use if 100% capacity is required.)

B

Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.25V/cell.
 3. Charged for 8 ~ 10 hours at limited current 0.05 CA.

C

Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE